

Thank you for your interest in **Little David** Case Sealers by **Loveshaw**. Here is your recently requested pricing for a Model **LDU/2** semi automatic uniform case sealing machine. The **LDU/2** case sealer will receive from your operator your uniform sized regular slotted cartons. It is understood that all flaps will be folded and closed prior to infeed. Bottom belt drive will propel the case through the taping process. The case will be processed and 2" wide pressure sensitive tape of commercially good quality will be applied to the top and bottom center seam with leading and trailing tape tabs of 2-1/4" to 2-1/2". The case will then be discharged onto your exit conveyor. The **LDU/2** case sealer which we propose will accept your uniform sized regular slotted containers within the following dimensions:

	<u>Length</u>	<u>Width</u>	<u>Height</u>
Min:	4-1/2"	4-1/2"	2-5/8"
Max:	INF	20"	24"

We propose production speeds of this equipment to be approximately twenty-six (26) containers per minute based on a 24" long case @ 80 feet per minute belt speed. However, throughput speeds of a semi automatic machine can only be determined by operator efficiency and length of time necessary for packing.

**Price Includes:**

- semi automatic uniform case sealer
- 110 volt single phase electric's
- removable and interchangeable **CASELOCKER ST** tape cartridges
- 80 FPM belt speed with a 1/3 HP drive motor
- self tensioning & centering drive belts
- 22-1/4" - 32-1/4" adjustable conveyor height with graduated scales in both inches & metric featuring slide & lock leg extensions
- 2-5/8" high case capability
- extended infeed side rails
- slide & lock case height & width adjustments
- right to left case flow
- flat bed infeed pack table

**Price, FOB, S. Canaan, PA Freight Collect***(plus applicable sales, use, privilege or excise taxes and Federal, State or local, if any)***\$5,895.00****Terms:**

Net 30 days.

**Installation:**

Installation, training &amp; service will be provided by the local distributor at prevailing rates.

The delivery of this **LDU/2** machine can be made in approximately one (1) week from receipt of a firm order. This quotation is valid for 60 days from date issued. Thank you for giving us the opportunity to bid for your business.

**Power requirements:**

110 VAC, 60 HZ, single phase, 15 amps

**Machine Weight:**

375 lbs. (uncrated)


**Machine Dimensions:**

55-1/2" L x 30-3/16" W x 61-3/16" H (37-1/2" w/o infeed pack table)

**Available Options :**

Top squeezer	.TSA/LDU	260.00
Pack table (flat bed-exit)	.ITA/LDU	225.00
Pack table (rollerbed) -exit	.ITA/RB/LDU	670.00
Pack table (rollerbed) -infeed	.ITA/RB/LDU/ED	670.00
Pack table (with box hold down device)	ITA/LDUHD/4.25	450.00
Casters	.LDC302	230.00
NEMA 12 electrical package	----	795.00
Top three flap folder	.TFF/LDU	260.00
Increased conveyor height from 33" to 38"	----	725.00
34" high case capability	----	460.00
Mirror image	----	950.00
Jet Printer Adapter	CPAOP00-LD1	135.00
3 phase electric's	----	350.00
Recommended spare parts kit	.RPK-LDU-2-ST-E	460.00
Custom paint	----	1,550.00
N E M A 4 wiring-enclosure & switch (wash-down, damp or humid environment)	----	2,185.00
NESTAFLEX Conveyor (model # 17514008) (14" wide - Polymer skate wheel - 2' 4" contracted - 8' 11" extended)	----	725.00
3" wide PST (top & bottom)	----	300.00
Spare cartridge	.CAC50 / .CAC60	1,250.00
Secondary stop button	----	480.00

## Uniform Legend Semi-Automatic Uniform

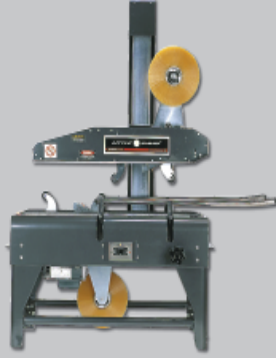

### Features:

- UL listed
- Patented single mast design allows clear access
- Can be ordered for 2" or 3" wide tape
- Self centering, self tensioning belts to reduce wear
- Robust drive system for heavy cases

### Specifications:

- Power requirements: 120 volts, single phase, 60 cycle, 6.5 Amps
- Operating Speed: continuous belt drive; 80' per minute (24.4m/min)
- Case capacity (with 2" wide CaseLocker ST™ cartridge):
  - Length: 4-1/2" (114mm) - infinite
  - Width: 4-1/2" (114mm) - 22" (559mm)
  - Height: 2-5/8" (64mm) - 24" (610mm)

### Features on all Case Sealers:

- Plug in operation, minimal operator training required
- Conveyor height is 22-1/4" for all except LD-16R is 24"
- Sealed drive system for low maintenance
- CaseLocker ST™ tape cartridge requires no lubrication
- Knife guard system of the CaseLocker ST™ tape cartridge allows the blade to be exposed only when the rollers are depressed
- 7 through 11 gauge steel - heavy duty construction
- Simple adjustments for quick changeover
- Low maintenance
- Warranty - Reliable Performance
  - 1 Year All Components\*
  - 2 Years Gear Reducer
  - 3 Years Cartridge\*

\*Moving and wear parts are not included. Other restrictions may apply.  
Consult Loveshaw or your authorized Little David® Distributor for details.

### Options: (Consult Factory)

- Casters
- Adjustable leg extensions
- High mast for box heights to 34" (864mm)
- Front and rear solid or roller pack table
- Top squeezers
- Folder/mailer
- Special colors matched in powder coating, stainless steel or STEEL IT is available
- NEMA 4, NEMA 7, 3 phase electrics
- Spare parts kit
- Top hold down sled (for semi-automatic case sealer model)
- Low tape warning
- No tape warning
- Spare parts kit
- Spare pressure sensitive tape cartridge